

**GATORCABLEWORKS**

CABLEWORKS



**FOCUS ON YOUR PERFORMANCE, NOT YOUR CABLE.  
SOUND PERFORMANCE.**

[WWW.GATORCO.COM](http://WWW.GATORCO.COM)

**GATORCABLEWORKS**



At CABLEWORKS we realize that whether you're playing live, recording, rehearsing with the band, or just practicing at home, a bad cable can distract you from your best performance. CABLEWORKS understands that the best cables are the ones you never have to think about.

Created by working musicians, CABLEWORKS uses premium connectors and conductors, along with a detailed assembly process to ensure that your cable will perform flawlessly every time you plug it in.



**CABLEWORKS CABLES  
COME WITH A LIMITED  
LIFETIME  
REPLACEMENT  
WARRANTY**

**CABLE IDENTIFICATION WITH  
TORICOLOR  
ID RINGS**

**INCLUDED IN THE HEADLINER AND COMPOSER SERIES**



**INSTRUMENT  
COMPOSER SERIES**

**XLR  
COMPOSER SERIES**

**SPEAKER  
COMPOSER SERIES**

**INSTRUMENT  
HEADLINER SERIES**

**XLR  
HEADLINER SERIES**

**SPEAKER  
HEADLINER SERIES**



**TECHNICAL DATA**

<b>JACKET COLOR:</b>	Black	Black
<b>JACKET DIAMETER:</b>	PVC 7.0mm	PVC 6.5mm
<b>AWG:</b>	24 AWG	22 AWG
<b>NO. OF INNER CONDUCTORS:</b>	1x0.22mm <sup>2</sup>	2x0.30mm <sup>2</sup>
<b>COPPER STRAND PER CONDUCTOR:</b>	28x0.10mm	38x0.10mm
<b>CONDUCTOR INSULATION:</b>	LLDPE 1.95mm	LLDPE 1.5mm
<b>SHIELDING:</b>	Copper Spiral Shielding with 48x0.10mm + semiconductor	Tin Plated Copper Braided Shielding with 128x0.10mm
<b>SHIELDING FACTOR:</b>	100%	95%
<b>TEMPERATURE RANGE:</b>	MIN. -20°C - MAX. +70°C	MIN. -20°C - MAX. +70°C

<b>JACKET COLOR:</b>	Black	Black	Black	Black
<b>JACKET DIAMETER:</b>	PVC 7.5mm	PVC 7.0mm	PVC 6.2mm	PVC 10.0mm
<b>AWG:</b>	14 AWG	22 AWG	24 AWG	12 AWG
<b>NO. OF INNER CONDUCTORS:</b>	2x2.0mm <sup>2</sup>	1x0.35mm <sup>2</sup>	4x0.22mm <sup>2</sup>	2x3.5mm <sup>2</sup>
<b>COPPER STRAND PER CONDUCTOR:</b>	64x0.20mm	20x0.15mm	28x0.10mm	68x0.25mm
<b>CONDUCTOR INSULATION:</b>	PVC 3.0mm	Foamed PE 3.6mm	LLDPE 1.4mm	PVC 3.75mm
<b>SHIELDING:</b>	-	Tin Plated Copper Braided Shielding with 128x0.10mm + Semiconductor	Tin Plated Copper Braided Shielding with 128x0.10mm	-
<b>SHIELDING FACTOR:</b>	-	100%	95%	-
<b>TEMPERATURE RANGE:</b>	MIN. -20°C - MAX. +70°C	MIN. -20°C - MAX. +70°C	MIN. -20°C - MAX. +70°C	MIN. -20°C - MAX. +70°C

**ELECTRICAL DATA**


<b>IMPEDANCE:</b>	46.8Ω	116Ω
<b>CAPAC. COND./COND. PER 1FT</b>	-	17.1pf
<b>CAPAC. COND./COND. PER 1M:</b>	-	56.0pf
<b>CAPAC. COND./SHIELD PER 1FT:</b>	31.4pf	37.2pf
<b>CAPAC. COND./SHIELD PER 1M:</b>	103pf	122pf
<b>COND. RESISTANCE PER 1KM:</b>	76.0Ω	56.0Ω
<b>SHIELD RESISTANCE PER 1KM:</b>	52.5Ω	23.5Ω
<b>INSULATION RESISTANCE PER 1KM:</b>	>1GΩ	>1GΩ

<b>IMPEDANCE:</b>	22.3Ω	50.3Ω	120Ω	21.4Ω
<b>CAPAC. COND./COND. PER 1FT</b>	-	-	14.9pf	-
<b>CAPAC. COND./COND. PER 1M:</b>	-	-	49.0pf	-
<b>CAPAC. COND./SHIELD PER 1FT:</b>	28.8pf	25.9pf	28.1pf	29.9pf
<b>CAPAC. COND./SHIELD PER 1M:</b>	94.5pf	85.2pf	92.0pf	98.2pf
<b>COND. RESISTANCE PER 1KM:</b>	7.0Ω	51.8Ω	80.0Ω	5.3Ω
<b>SHIELD RESISTANCE PER 1KM:</b>	-	27.4Ω	23.2Ω	-
<b>INSULATION RESISTANCE PER 1KM:</b>	>20MΩ	>1GΩ	>1GΩ	>20MΩ

**NEW!**  
**Wireless Bodypack**  
 1/4" TS Male / RA - 1/4" TA4F

MODEL NO.	CABLE LENGTH
GCWH-TA4F-30T	3 Foot
GCWH-TA4F-3RA0T	20 Foot

# HEADLINER SERIES INSTRUMENT CABLES

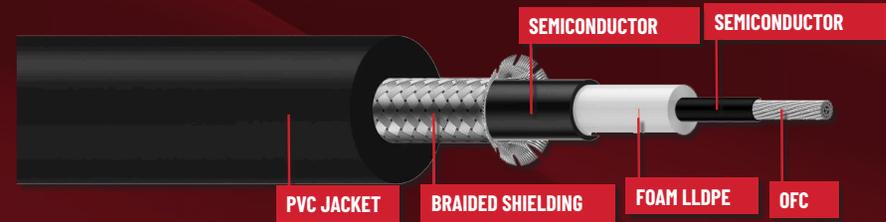

## HEADLINER SERIES

The Headliner Series is CABLEWORKS premium-grade cable line that features our best-performing, lowest capacitance conductors, providing optimal signal transmission. Headliner cables are covered in durable and flexible PVC jackets, ensuring long-lasting reliability. The Headliner instrument, XLR, and TS speaker cables include CABLEWORKS "Patent Pending" connectors that feature a rugged design highlighted by our TORICOLOR ID rings for easy identification when using multiple cables. The brass, gold-plated, contacts provide maximum conductivity and extreme corrosion resistance.



**TORICOLOR  
 ID RINGS**



**Straight to Straight**  
 1/4" TS Male - 1/4" TS Male

MODEL NUMBER	CABLE LENGTH
GCWH-INS-03	3 Foot
GCWH-INS-10	10 Foot
GCWH-INS-20	20 Foot
GCWH-INS-30	30 Foot



**Straight to Straight Quiet**  
 1/4" TS Male - 1/4" TS Male

MODEL NO.	CABLE LENGTH
GCWH-INS-100T	10 Foot
GCWH-INS-200T	20 Foot
GCWH-INS-300T	30 Foot



**Straight to Right Angle**  
 1/4" TS Male - 1/4" TS Male RA

MODEL NUMBER	CABLE LENGTH
GCWH-INS-03RA	3 Foot
GCWH-INS-10RA	10 Foot
GCWH-INS-20RA	20 Foot
GCWH-INS-30RA	30 Foot



**Straight to Right Angle Quiet**  
 1/4" TS Male - 1/4" TS Male RA


MODEL NO.	CABLE LENGTH
GCWH-INS-10RA0T	10 Foot
GCWH-INS-20RA0T	20 Foot
GCWH-INS-30RA0T	30 Foot



**Right Angle Patch**  
 1/4" TS Male RA - 1/4" TS Male RA

MODEL NO.	CABLE LENGTH
GCWH-INS-6INRA	6 Inch

# SPEAKER CABLES

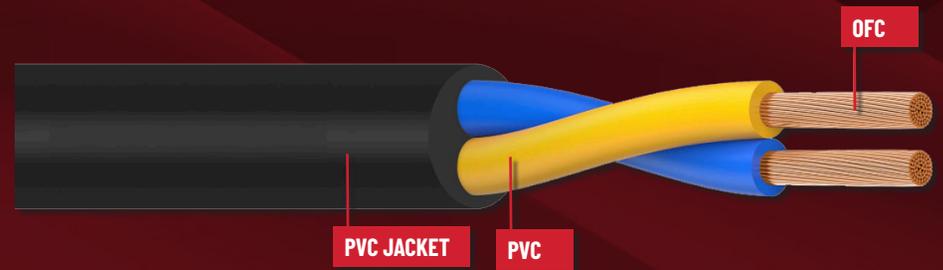

### TS Speaker Cable

1/4" TS Male - 1/4" TS Male

MODEL NO.	CABLE LENGTH
GCWH-SPK-03	3 Foot
GCWH-SPK-06	6 Foot
GCWH-SPK-10	10 Foot
GCWH-SPK-15	15 Foot
GCWH-SPK-25	25 Foot



### TS to Twist Lock

1/4" TS Male - Twist Lock

MODEL NO.	CABLE LENGTH
GCWH-SPK-03-ITL	3 Foot
GCWH-SPK-06-ITL	6 Foot
GCWH-SPK-10-ITL	10 Foot
GCWH-SPK-15-ITL	15 Foot
GCWH-SPK-25-ITL	25 Foot



### Twist Lock

Twist Lock - Twist Lock

MODEL NO.	CABLE LENGTH
GCWH-SPK-03-2TL	3 Foot
GCWH-SPK-06-2TL	6 Foot
GCWH-SPK-10-2TL	10 Foot
GCWH-SPK-15-2TL	15 Foot
GCWH-SPK-25-2TL	25 Foot



HEADLINER SERIES  
**XLR CABLES**



**XLR Microphone**  
*XLR Male - XLR Female*

MODEL NO.	CABLE LENGTH
GCWH-XLR-03	3 Foot
GCWH-XLR-06	6 Foot
GCWH-XLR-10	10 Foot
GCWH-XLR-20	20 Foot
GCWH-XLR-30	30 Foot
GCWH-XLR-50	50 Foot
GCWH-XLR-75	75 Foot
GCWH-XLR-100	100 Foot

**UB X 12**

Batch  
 59 1737

**CAUTION**  
 RISK OF ELECTRIC SHOCK  
 DO NOT OPEN

MADE IN CHINA

# COMPOSER SERIES

The Composer Series is CABLEWORKS professional-grade cable line that features upgraded, well-shielded, low-capacitance conductors and durable PVC jackets delivering a reliable and clear signal. The Composer instrument, XLR, and TS speaker cables include CABLEWORKS "Patent Pending" connectors that feature a rugged design highlighted by our TORIColor ID rings for easy identification when using multiple cables. The brass, nickel-plated & tin-plated, contacts provide strong conductivity and high corrosion resistance.



TORICOLOR ID RINGS

## COMPOSER SERIES

# INSTRUMENT CABLES



### Straight to Straight

1/4" TS Male - 1/4" TS Male

MODEL NO.	CABLE LENGTH
GCWC-INS-03	3 Foot
GCWC-INS-10	10 Foot
GCWC-INS-20	20 Foot
GCWC-INS-30	30 Foot



### Straight to Right Angle

1/4" TS Male - 1/4" TS Male RA

MODEL NO.	CABLE LENGTH
GCWC-INS-03RA	3 Foot
GCWC-INS-10RA	6 Foot
GCWC-INS-20RA	20 Foot
GCWC-INS-30RA	30 Foot



### NEW!

### Wireless Bodypack

1/4" TS Male / RA - 1/4" TA4F

MODEL NO.	CABLE LENGTH
GCWC-TA4F-3	3 Foot
GCWC-TA4F-3RA	20 Foot

## COMPOSER SERIES

# PATCH CABLES



### NEW!

### Flat Patch Cables

1/4" Right Angle TS

MODEL NO.	CABLE LENGTH
GCWC-FPC3*	3 Foot
GCWC-FPC6*	6 Foot
GCWC-FPC12*	12 Foot
GCWC-FPC24	24 Foot

\*Available in 3-Pack

### NEW!

## COMPOSER FLAT PATCH CABLES

# SPEAKER CABLES



## Twist Lock

Twist Lock - Twist Lock

MODEL NO.	CABLE LENGTH
GCWC-SPK-03-2TL	3 Foot
GCWC-SPK-06-2TL	6 Foot
GCWC-SPK-10-2TL	10 Foot
GCWC-SPK-15-2TL	15 Foot
GCWC-SPK-25-2TL	25 Foot
GCWC-SPK-50-2TL	50 Foot



## TS to Twist Lock

1/4" TS Male - Twist Lock

MODEL NO.	CABLE LENGTH
GCWC-SPK-03-1TL	3 Foot
GCWC-SPK-06-2TL	6 Foot
GCWC-SPK-10-1TL	10 Foot
GCWC-SPK-15-1TL	15 Foot
GCWC-SPK-25-1TL	25 Foot
GCWC-SPK-50-1TL	50 Foot
GCWC-SPK-100-1TL	100 Foot

# XLR CABLES



## XLR Microphone

XLR Male - XLR Female

MODEL NO.	CABLE LENGTH
GCWC-XLR-03	3 Foot
GCWC-XLR-06	6 Foot
GCWC-XLR-10	10 Foot
<b>NEW!</b> GCWC-XLR-15	15 Foot
GCWC-XLR-20	20 Foot
<b>NEW!</b> GCWC-XLR-25	25 Foot
GCWC-XLR-30	30 Foot
GCWC-XLR-50	50 Foot
GCWC-XLR-75	75 Foot
GCWC-XLR-100	100 Foot



## XLR to TRS

XLR Female - 1/4" TRS Male

MODEL NO.	CABLE LENGTH
GCWC-XLR-18INFTRS	18 Inch
GCWC-XLR-05FTRS	6 Foot
GCWC-XLR-10FTRS	10 Foot
GCWC-XLR-20FTRS	20 Foot



## XLR M to TRS

XLR Male - 1/4" TRS Male

MODEL NO.	CABLE LENGTH
GCWC-XLR-181MTRS	18 Inch
GCWC-XLR-05MTRS	5 Foot
GCWC-XLR-10MTRS	10 Foot
GCWC-XLR-20MTRS	20 Foot



# BACKLINE SERIES

Cableworks Backline Series cables are a best-in-class line of cables for music and audio professionals. The line consists of instrument, XLR, and speaker cables to accommodate all your audio needs. With highly durable and flexible jackets, classic reliable connectors, and oxygen-free conductors, the Backline Series can be relied upon every time you plug it in.

## BACKLINE SERIES INSTRUMENT CABLES



**Straight to Straight**  
1/4" TS Male - 1/4" TS Male

MODEL NO.	CABLE LENGTH
GCWB-INS-05	5 Foot
GCWB-INS-10	10 Foot
GCWB-INS-20	20 Foot
GCWB-INS-30	30 Foot



**Straight to Right Angle**  
1/4" TS Male - 1/4" TS Male RA

MODEL NO.	CABLE LENGTH
GCWB-INS-6INRA3PK	6 Inch
GCWB-INS-05RA	5 Foot
GCWB-INS-10RA	10 Foot
GCWB-INS-20RA	20 Foot
GCWB-INS-30RA	30 Foot



**NEW!**  
**Braided Straight to Right Angle**  
1/4" TS Male - 1/4" TS Male RA

MODEL NO.	CABLE LENGTH
GCWB-INS-10RA	10 Foot
GCWB-INS-20RA	20 Foot

## BACKLINE SERIES BALANCED CABLES

**NEW!**  
**Balanced**  
1/4" TRS Male - 1/4" TRS Male



MODEL NO.	CABLE LENGTH
GCWB-BPC-1	1 Foot
GCWB-BPC-2	2 Foot
GCWB-BPC-3	3 Foot
GCWB-BPC-5	5 Foot
GCWB-BPC-10	10 Foot
GCWB-BPC-15	15 Foot
GCWB-BPC-20	20 Foot
GCWB-BPC-30	30 Foot
GCWB-BPC-50	50 Foot

# SPEAKER CABLES



### TS Speaker

1/4" TS Male - 1/4" TS Male

MODEL NO.	CABLE LENGTH
GCWB-SPK-03	3 Foot
GCWB-SPK-06	6 Foot
GCWB-SPK-10	10 Foot
GCWB-SPK-25	25 Foot
GCWB-SPK-50	50 Foot



### TS to Twist Lock

1/4" TS Male - Twist Lock

MODEL NO.	CABLE LENGTH
GCWB-SPK-10-ITL	10 Foot
GCWB-SPK-25-ITL	25 Foot
GCWB-SPK-50-ITL	50 Foot



### Twist Lock

Twist Lock - Twist Lock

MODEL NO.	CABLE LENGTH
GCWB-SPK-10-2TL	10 Foot
GCWB-SPK-25-2TL	25 Foot
GCWB-SPK-50-2TL	50 Foot

# XLR CABLES



### XLR Microphone

XLR Male - XLR Female

MODEL NO.	CABLE LENGTH
GCWB-XLR-03	3 Foot
GCWB-XLR-05	5 Foot
GCWB-XLR-10	10 Foot
<b>NEW!</b> GCWB-XLR-15	15 Foot
GCWB-XLR-20	20 Foot
<b>NEW!</b> GCWB-XLR-25	25 Foot
GCWB-XLR-30	30 Foot
GCWB-XLR-50	50 Foot

# SNAKES



**FEATURED MODEL**  
GCWB-DS6X2-20

### 6-Channel Drop Snake

XLR Box Input - XLR Fan

MODEL NO.	CABLE LENGTH
GCWB-DS6X2-20	20 Foot
GCWB-DS6X2-30	30 Foot
GCWB-DS6X2-50	50 Foot



### 8-Channel Drop Snake

XLR Box Input - XLR Fan

MODEL NO.	CABLE LENGTH
GCWB-DS8X2-25	25 Foot
GCWB-DS8X2-50	50 Foot



Follow us on social:



@gatorcases



GATORCASES

GATORFRAMEWORKS

GATOR RACKWORKS

GATORCABLEWORKS



SHURE

Official  
Licensed  
Product

Licensed by Gator Cases